


## General Purpose Plastic Rectifier Diode in DO-201AD

### Features

- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High current capability

### Mechanical Data

- **Case:** JEDEC DO-204AC(DO-201AD)molded plastic  
Lead free; RoHS compliant
- **Molding Compound Flammability Rating:**  
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:  
260 °C/10 sec. at terminals



<b>Absolute Maximum Ratings</b>											
Ratings at 25 °C, ambient temperature unless otherwise specified											
PARAMETER	SYM OL	1N5400	1N5401	1N5402	1N5403	1N5404	1N5405	1N5406	1N5407	1N5408	UNIT
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	300	400	500	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	210	280	350	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	300	400	500	600	800	1000	V
Maximum average forward rectified current 0.5" (12.5 mm) lead length at T <sub>L</sub> = 105 °C	I <sub>F(AV)</sub>	3.0									A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	200									A
Maximum full load reverse current, full cycle average 0.5" (12.5 mm) lead length at T <sub>L</sub> = 105 °C	I <sub>R(AV)</sub>	500									μA
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	- 50 to + 150									°C

<b>Electrical Characteristics</b>												
(T <sub>A</sub> = 25 °C unless otherwise specified)												
PARAMETER	TEST CONDITIONS	SYMBOL	1N5400	1N5401	1N5402	1N5403	1N5404	1N5405	1N5406	1N5407	1N5408	UNIT
Maximum instantaneous forward voltage	3.0 A	V <sub>F</sub>	1.2									V
Maximum DC reverse current at rated DC blocking voltage	T <sub>A</sub> = 25 °C	I <sub>R</sub>	5.0									μA
	T <sub>A</sub> = 150 °C		500									
Typical junction capacitance	4.0 V, 1 MHz	C <sub>J</sub>	30									pF

**Typical Characteristics** ( $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

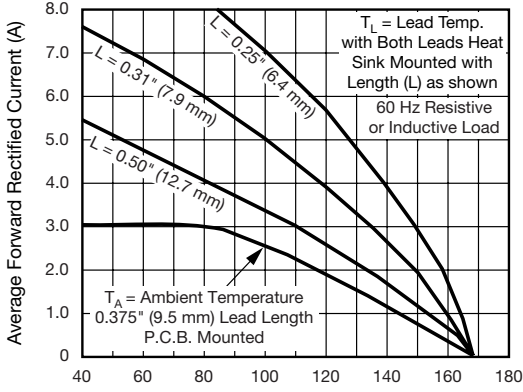


Fig. 1 - Forward Current Derating Curve

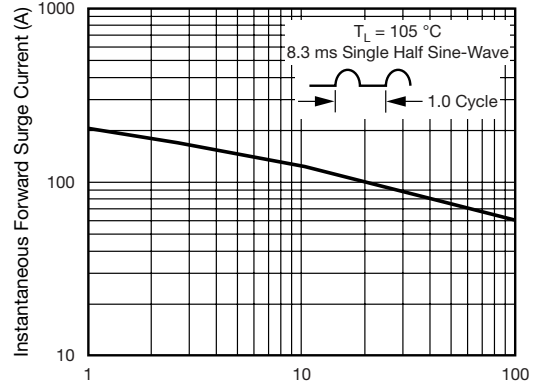


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

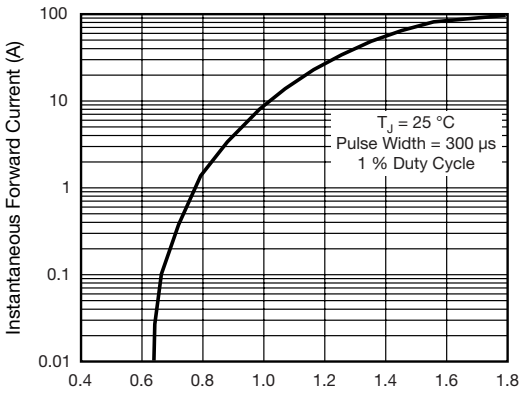


Fig. 3 - Typical Instantaneous Forward Characteristics

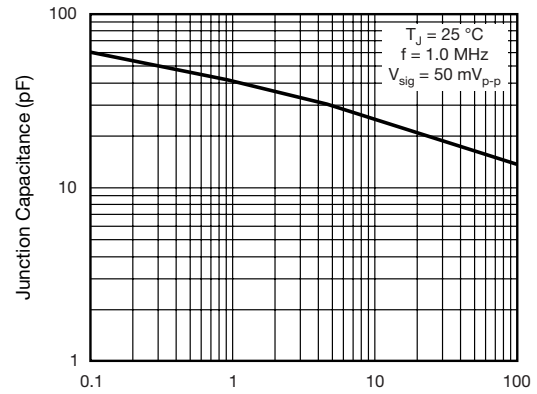


Fig. 5 - Typical Junction Capacitance

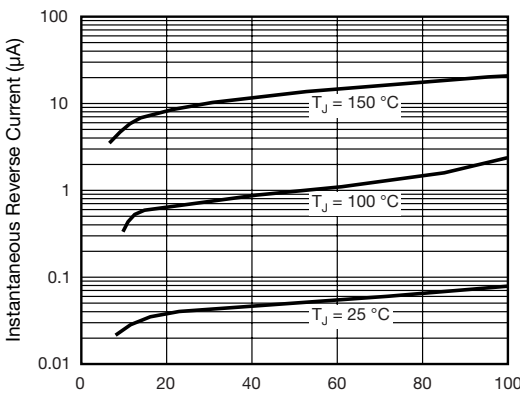


Fig. 4 - Typical Reverse Characteristics


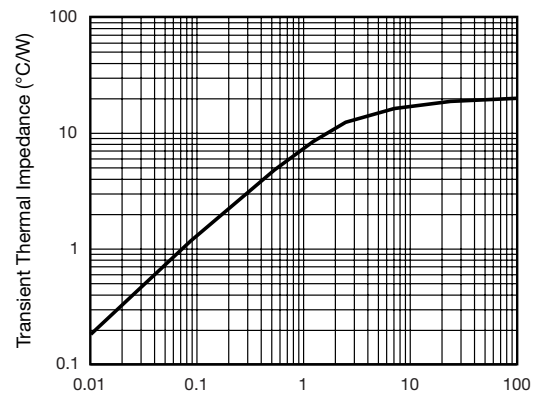


Fig. 6 - Typical Transient Thermal Impedance

**Package Dimensions**

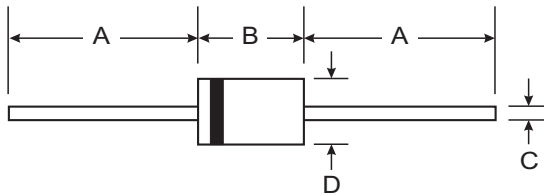

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

**Ordering information**

Order code	Package	Packaging option	Base quantity	Packaging specification
1N54XX	DO-201AD	Tape and BOX	1250pcs / BOX	

**Revision history**

Date	Revision	Changes
23-May-2020	1.0	Initial release

## CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, RDSEMI does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and RDSEMI assumes no liability what's ever relating to the choice, selection or use of the RDSEMI products and services described herein.

RDSEMI reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an RDSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. RDSEMI accepts no liability for inclusion and/or use of RDSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of RDSEMI products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by RDSEMI for the RDSEMI product or service described herein and shall not create or extend in any manner whatsoever, any liability of RDSEMI.

RDSEMI expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. RDSEMI only obligations are those in the RDSEMI Standard Terms and Conditions of Sale and in no case will RDSEMI be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

---

Specifications are subject to change without notice  
© Copyright 2020, DaJing Semiconductor  
All rights reserved