


Power TVS in DO-15 / DO-204AC

Features

- Glass passivated chip
- 500W peak pulse power(10/1000us)
- High accuracy, 1% tolerance
- Uni and Bidirectional unit
- Low clamping voltage
- Low Leakage current
- Very fast response time

Mechanical Data

- **Case:** DO-15/DO-204AC (plastic package).
RoHS compliant
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

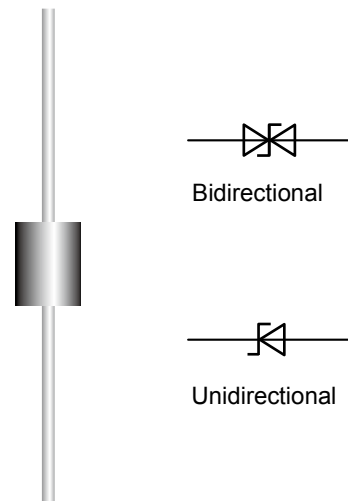

Applications

- Computers
- Telecom system
- Industrial equipments
- Consumer electronic applications
- Other VCC bus and I/O interfaces

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak pulse power dissipation with a 10/1000us waveform ⁽¹⁾	P _{PP}	500	W
Maximum peak reverse pulse current a 10/1000us waveform ⁽¹⁾	I _{PP}	See Next Table	A
Peak forward surge current 8.3ms single half sine-wave ⁽²⁾	I _{FSM}	70	A
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

Notes:

1.Non-repetitive current pulse,per Fig.5 and detated above TA=25°C per Fig.1


2.Measured on 8.3ms single half sine-wave,or equivalent square wave,duty cycle=4 pulses per minute maximum

Electrical Characteristics


($T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

Type Number		Reverse Stand-Off Voltage	Breakdown Voltage@ I_T		Test Current	Maximum Clamping Voltage@ I_{PP}	Peak Pulse Current	Reverse Leakage @ V_{RWM}
(UNI)	(BI)	$V_{RWM}(V)$	$V_{BR\ MIN.}(V)$	$V_{BR\ MAX.}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
SA5.0A	SA5.0CA	5.0	6.40	7.00	10	9.2	55.4	600
SA6.0A	SA6.0CA	6.0	6.67	7.37	10	10.3	49.5	600
SA6.5A	SA6.5CA	6.5	7.22	7.98	10	11.2	45.5	400
SA7.0A	SA7.0CA	7.0	7.78	8.60	10	12.0	42.5	150
SA7.5A	SA7.5CA	7.5	8.33	9.21	1	12.9	39.5	50
SA8.0A	SA8.0CA	8.0	8.89	9.83	1	13.6	37.5	25
SA8.5A	SA8.5CA	8.5	9.44	10.40	1	14.4	35.4	10
SA9.0A	SA9.0CA	9.0	10.00	11.10	1	15.4	33.1	5
SA10A	SA10CA	10.0	11.10	12.30	1	17.0	30.0	5
SA11A	SA11CA	11.0	12.20	13.50	1	18.2	28.0	5
SA12A	SA12CA	12.0	13.30	14.70	1	19.9	25.6	5
SA13A	SA13CA	13.0	14.40	15.90	1	21.5	23.7	5
SA14A	SA14CA	14.0	15.60	17.20	1	23.2	22.0	5
SA15A	SA15CA	15.0	16.70	18.50	1	24.4	20.0	5
SA16A	SA16CA	16.0	17.80	19.70	1	26.0	19.6	5
SA17A	SA17CA	17.0	18.90	20.90	1	27.6	18.5	5
SA18A	SA18CA	18.0	20.00	22.10	1	29.2	17.5	5
SA20A	SA20CA	20.0	22.20	24.50	1	32.4	15.7	5
SA22A	SA22CA	22.0	24.40	26.90	1	35.5	14.4	5
SA24A	SA24CA	24.0	26.70	29.50	1	38.9	13.1	5
SA26A	SA26CA	26.0	28.90	31.90	1	42.1	12.1	5
SA28A	SA28CA	28.0	31.10	34.40	1	45.4	11.2	5
SA30A	SA30CA	30.0	33.30	36.80	1	48.4	10.5	5
SA33A	SA33CA	33.0	36.70	40.60	1	53.3	9.6	5
SA36A	SA36CA	36.0	40.00	44.20	1	58.1	8.8	5
SA40A	SA40CA	40.0	44.40	49.10	1	64.5	7.9	5
SA43A	SA43CA	43.0	47.80	52.80	1	69.4	7.3	5
SA45A	SA45CA	45.0	50.00	55.30	1	72.7	7.0	5
SA48A	SA48CA	48.0	53.30	58.90	1	77.4	6.6	5
SA51A	SA51CA	51.0	56.70	62.70	1	82.4	6.2	5
SA54A	SA54CA	54.0	60.00	66.30	1	87.1	5.0	5
SA58A	SA58CA	58.0	64.40	71.20	1	93.6	5.4	5
SA60A	SA60CA	60.0	66.70	73.70	1	96.8	5.3	5
SA64A	SA64CA	64.0	71.10	78.60	1	103.0	5.0	5
SA70A	SA70CA	70.0	77.80	86.00	1	113.0	4.5	5
SA75A	SA75CA	75.0	83.30	92.10	1	121.0	4.2	5
SA78A	SA78CA	78.0	86.70	95.80	1	126.0	4.0	5
SA85A	SA85CA	85.0	94.40	104.00	1	137.0	3.7	5
SA90A	SA90CA	90.0	100.00	111.00	1	146.0	3.5	5
SA100A	SA100CA	100.0	111.00	123.00	1	162.0	3.1	5
SA110A	SA110CA	110.0	122.00	135.00	1	177.0	2.0	5
SA120A	SA120CA	120.0	133.00	147.00	1	193.0	2.6	5
SA130A	SA130CA	130.0	144.00	159.00	1	209.0	2.4	5
SA150A	SA150CA	150.0	167.00	185.00	1	243.0	2.1	5
SA160A	SA160CA	160.0	178.00	197.00	1	259.0	2.0	5
SA170A	SA170CA	170.0	189.00	209.00	1	275.0	1.9	5
SA180A	SA180CA	180.0	200.00	233.00	1	289.0	1.7	5

Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

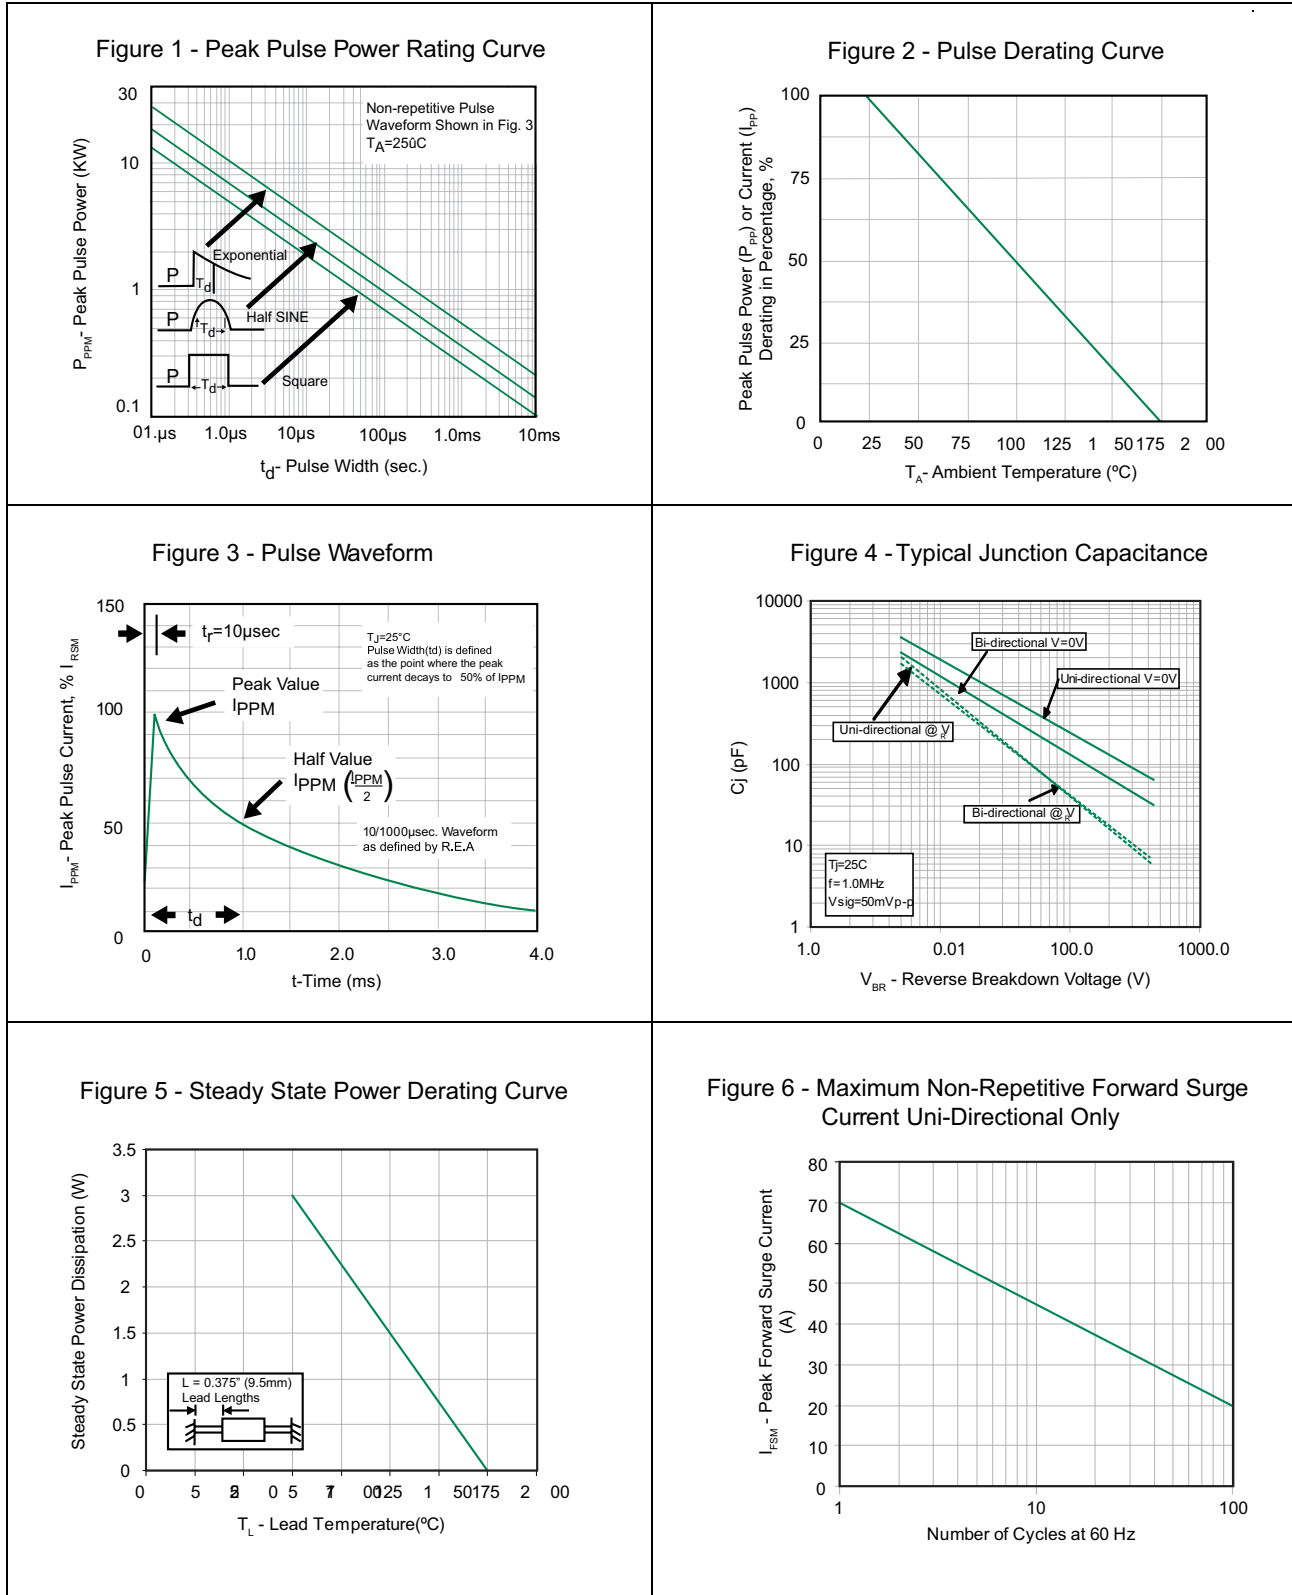

Package Dimensions

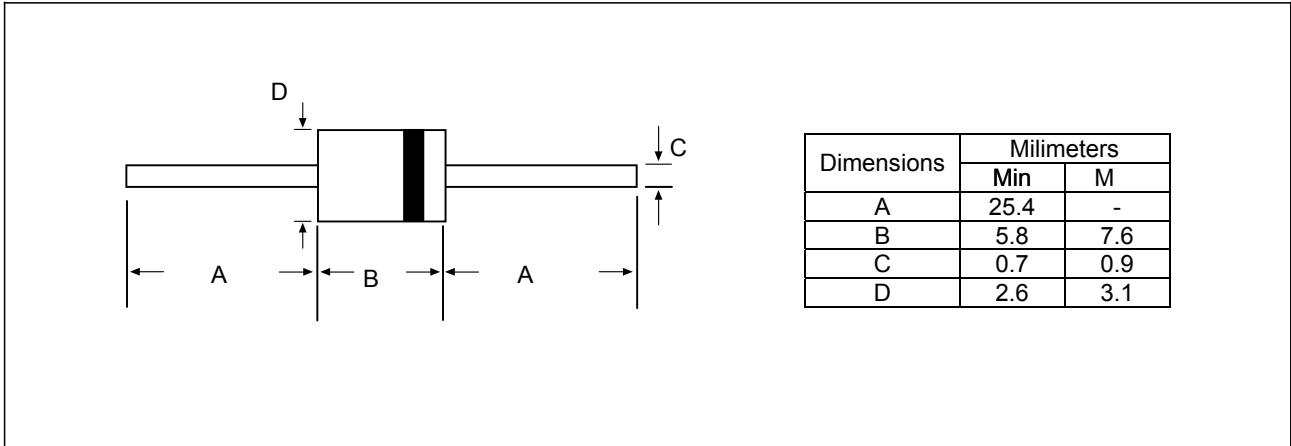

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
SA Series	DO-15/DO-204AC	Tape and BOX	3000pcs / reel	EIA STD RS-481

Revision history

Date	Revision	Changes
23-May-2020	1.0	Initial release

CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, RDSEMI does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and RDSEMI assumes no liability what's ever relating to the choice, selection or use of the RDSEMI products and services described herein.

RDSEMI reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an RDSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. RDSEMI accepts no liability for inclusion and/or use of RDSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of RDSEMI products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by RDSEMI for the RDSEMI product or service described herein and shall not create or extend in any manner whatsoever, any liability of RDSEMI.

RDSEMI expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. RDSEMI only obligations are those in the RDSEMI Standard Terms and Conditions of Sale and in no case will RDSEMI be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice
© Copyright 2020, DaJing Semiconductor
All rights reserved