
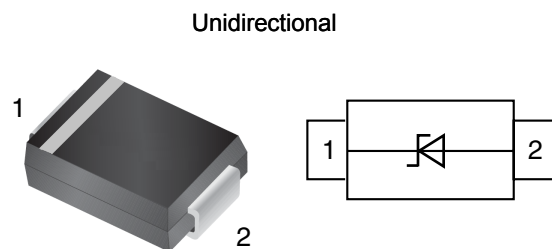


Power TVS in DO-214AA/SMB

Features

- Glass passivated chip
- 600W peak pulse power(10/1000us)
- High accuracy, 5% tolerance
- Uni and Bidirectional unit
- Low clamping voltage
- Low Leakage current
- Very fast response time
- Meet MSL level1, per J-STD-020, LF maximum peak of 260°C
- JESD22-A114-B ESD Voltage:HBM 15KV
- JEDEC EIA/JESD22-C101F ESD Voltage:CDM 500V
- JEDEC EIA/JESD22-A115 ESD Voltage:MM 400V
- ESD-immunity acc. IEC 61000-4-2 ±30KV contact±30KV air
- Base P/N-HM AEC-Q101 qualified

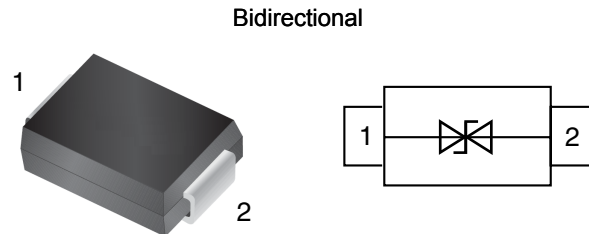

Mechanical Data

- **Case:** DO-214AA/SMB (plastic package).
RoHS compliant
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals



RoHS
COMPLIANT
HALOGEN
FREE

Applications

- Computers
- Telecom system
- Industrial equipments
- Consumer electronic applications
- Other VCC bus and I/O interfaces

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak pulse power dissipation with a 10/1000us waveform ⁽¹⁾	P _{PP}	600	W
Maximum peak reverse pulse current a 10/1000us waveform ⁽¹⁾	I _{PP}	See Next Table	A
Peak forward surge current 8.3ms single half sine-wave ⁽²⁾	I _{FSM}	100	A
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

Notes:

- 1.Non-repetitive current pulse,per Fig.5 and detated above TA=25°C per Fig.1
- 2.Measured on 8.3ms single half sine-wave,or equivalent square wave,duty cycle=4 pulses per minute maximum

Electrical Characteristics


 (T_A = 25 °C unless otherwise specified)

Part Number	marking	Direction	Maximum Working Voltage V _{RWM} (V)	Maximum Reverse Current@V _{RWM} I _R max(μA)	Breakdown Voltage@I _T			Peak Surge Current I _{PP} (A)	Maximum Clamping Voltage@I _{PP} V _C (V)
					V _{BR} min(V)	V _{BR} max(V)	I _T (mA)		
SMBJ5.0A	KE	Uni-Dir	5.0	800	6.4	7.00	10	65.22	9.2
SMBJ5.0CA	AE	Bi-Dir	5.0	1600	6.4	7.00	10	65.22	9.2
SMBJ6.0A	KG	Uni-Dir	6.0	800	6.7	7.37	10	58.25	10.3
SMBJ6.0CA	AG	Bi-Dir	6.0	1600	6.7	7.37	10	58.25	10.3
SMBJ6.5A	KK	Uni-Dir	6.5	500	7.2	7.98	10	53.57	11.2
SMBJ6.5CA	AK	Bi-Dir	6.5	1000	7.2	7.98	10	53.57	11.2
SMBJ7.0A	KM	Uni-Dir	7.0	200	7.8	8.60	10	50.00	12.0
SMBJ7.0CA	AM	Bi-Dir	7.0	400	7.8	8.60	10	50.00	12.0
SMBJ7.5A	KP	Uni-Dir	7.5	100	8.3	9.21	1	46.51	12.9
SMBJ7.5CA	AP	Bi-Dir	7.5	200	8.3	9.21	1	46.51	12.9
SMBJ8.0A	KR	Uni-Dir	8.0	50	8.9	9.83	1	44.12	13.6
SMBJ8.0CA	AR	Bi-Dir	8.0	100	8.9	9.83	1	44.12	13.6
SMBJ8.5A	KT	Uni-Dir	8.5	10	9.4	10.40	1	41.67	14.4
SMBJ8.5CA	AT	Bi-Dir	8.5	20	9.4	10.40	1	41.67	14.4
SMBJ9.0A	KV	Uni-Dir	9.0	5	10.0	11.10	1	38.96	15.4
SMBJ9.0CA	AV	Bi-Dir	9.0	10	10.0	11.10	1	38.96	15.4
SMBJ10A	KX	Uni-Dir	10.0	5	11.1	12.30	1	35.29	17.0
SMBJ10CA	AX	Bi-Dir	10.0	10	11.1	12.30	1	35.29	17.0
SMBJ11A	KZ	Uni-Dir	11.0	1	12.2	13.50	1	32.97	18.2
SMBJ11CA	AZ	Bi-Dir	11.0	1	12.2	13.50	1	32.97	18.2
SMBJ12A	LE	Uni-Dir	12.0	1	13.3	14.70	1	30.15	19.9
SMBJ12CA	BE	Bi-Dir	12.0	1	13.3	14.70	1	30.15	19.9
SMBJ13A	LG	Uni-Dir	13.0	1	14.4	15.90	1	27.91	21.5
SMBJ13CA	BG	Bi-Dir	13.0	1	14.4	15.90	1	27.91	21.5
SMBJ14A	LK	Uni-Dir	14.0	1	15.6	17.20	1	25.86	23.2
SMBJ14CA	BK	Bi-Dir	14.0	1	15.6	17.20	1	25.86	23.2
SMBJ15A	LM	Uni-Dir	15.0	1	16.7	18.50	1	24.59	24.4
SMBJ15CA	BM	Bi-Dir	15.0	1	16.7	18.50	1	24.59	24.4
SMBJ16A	LP	Uni-Dir	16.0	1	17.8	19.70	1	23.08	26.0
SMBJ16CA	BP	Bi-Dir	16.0	1	17.8	19.70	1	23.08	26.0
SMBJ17A	LR	Uni-Dir	17.0	1	18.9	20.90	1	21.74	27.6
SMBJ17CA	BR	Bi-Dir	17.0	1	18.9	20.90	1	21.74	27.6
SMBJ18A	LT	Uni-Dir	18.0	1	20.0	22.10	1	20.55	29.2
SMBJ18CA	BT	Bi-Dir	18.0	1	20.0	22.10	1	20.55	29.2
SMBJ19A	LW	Uni-Dir	19.0	1	21.1	23.30	1	19.49	30.8
SMBJ19CA	BW	Bi-Dir	19.0	1	21.1	23.30	1	19.49	30.8
SMBJ20A	LV	Uni-Dir	20.0	1	22.2	24.50	1	18.52	32.4
SMBJ20CA	BV	Bi-Dir	20.0	1	22.2	24.50	1	18.52	32.4


Part Number	marking	Direction	Maximum Working Voltage V_{RWM} (V)	Maximum Reverse Current@ V_{RWM} I_R max(μ A)	Breakdown Voltage@ I_T			Peak Surge Current I_{PP} (A)	Maximum Clamping Voltage@ I_{PP} V_C (V)
					V_{BR} min(V)	V_{BR} max(V)	I_T (mA)		
SMBJ22A	LX	Uni-Dir	22.0	1	24.4	26.90	1	16.90	35.5
SMBJ22CA	BX	Bi-Dir	22.0	1	24.4	26.90	1	16.90	35.5
SMBJ24A	LZ	Uni-Dir	24.0	1	26.7	29.50	1	15.42	38.9
SMBJ24CA	BZ	Bi-Dir	24.0	1	26.7	29.50	1	15.42	38.9
SMBJ26A	ME	Uni-Dir	26.0	1	28.9	31.90	1	14.25	42.1
SMBJ26CA	CE	Bi-Dir	26.0	1	28.9	31.90	1	14.25	42.1
SMBJ28A	MG	Uni-Dir	28.0	1	31.1	34.40	1	13.22	45.4
SMBJ28CA	CG	Bi-Dir	28.0	1	31.1	34.40	1	13.22	45.4
SMBJ30A	MK	Uni-Dir	30.0	1	33.3	36.80	1	12.40	48.4
SMBJ30CA	CK	Bi-Dir	30.0	1	33.3	36.80	1	12.40	48.4
SMBJ33A	MM	Uni-Dir	33.0	1	36.7	40.60	1	11.26	53.3
SMBJ33CA	CM	Bi-Dir	33.0	1	36.7	40.60	1	11.26	53.3
SMBJ36A	MP	Uni-Dir	36.0	1	40.0	44.20	1	10.33	58.1
SMBJ36CA	CP	Bi-Dir	36.0	1	40.0	44.20	1	10.33	58.1
SMBJ40A	MR	Uni-Dir	40.0	1	44.4	49.10	1	9.30	64.5
SMBJ40CA	CR	Bi-Dir	40.0	1	44.4	49.10	1	9.30	64.5
SMBJ43A	MT	Uni-Dir	43.0	1	47.8	52.80	1	8.65	69.4
SMBJ43CA	CT	Bi-Dir	43.0	1	47.8	52.80	1	8.65	69.4
SMBJ45A	MV	Uni-Dir	45.0	1	50.0	55.30	1	8.25	72.7
SMBJ45CA	CV	Bi-Dir	45.0	1	50.0	55.30	1	8.25	72.7
SMBJ48A	MX	Uni-Dir	48.0	1	53.3	58.90	1	7.75	77.4
SMBJ48CA	CX	Bi-Dir	48.0	1	53.3	58.90	1	7.75	77.4
SMBJ51A	MZ	Uni-Dir	51.0	1	56.7	62.70	1	7.28	82.4
SMBJ51CA	CZ	Bi-Dir	51.0	1	56.7	62.70	1	7.28	82.4
SMBJ54A	NE	Uni-Dir	54.0	1	60.0	66.30	1	6.89	87.1
SMBJ54CA	DE	Bi-Dir	54.0	1	60.0	66.30	1	6.89	87.1
SMBJ58A	NG	Uni-Dir	58.0	1	64.4	71.20	1	6.41	93.6
SMBJ58CA	DG	Bi-Dir	58.0	1	64.4	71.20	1	6.41	93.6
SMBJ60A	NK	Uni-Dir	60.0	1	66.7	73.70	1	6.20	96.8
SMBJ60CA	DK	Bi-Dir	60.0	1	66.7	73.70	1	6.20	96.8
SMBJ64A	NM	Uni-Dir	64.0	1	71.1	78.60	1	5.83	103.0
SMBJ64CA	DM	Bi-Dir	64.0	1	71.1	78.60	1	5.83	103.0
SMBJ70A	NP	Uni-Dir	70.0	1	77.8	86.00	1	5.31	113.0
SMBJ70CA	DP	Bi-Dir	70.0	1	77.8	86.00	1	5.31	113.0
SMBJ75A	NR	Uni-Dir	75.0	1	83.3	92.10	1	4.96	121.0
SMBJ75CA	DR	Bi-Dir	75.0	1	83.3	92.10	1	4.96	121.0
SMBJ78A	NT	Uni-Dir	78.0	1	86.7	95.80	1	4.76	126.0
SMBJ78CA	DT	Bi-Dir	78.0	1	86.7	95.80	1	4.76	126.0

Part Number	marking	Direction	Maximum Working Voltage V_{RWM} (V)	Maximum Reverse Current@ V_{RWM} I_R max(μ A)	Breakdown Voltage@ I_T			Peak Surge Current I_{PP} (A)	Maximum Clamping Voltage@ I_{PP} V_C (V)
					V_{BR} min(V)	V_{BR} max(V)	I_T (mA)		
SMBJ80A	NW	Uni-Dir	80.0	1	88.8	97.60	1	4.63	129.6
SMBJ80CA	DW	Bi-Dir	80.0	1	88.8	97.60	1	4.63	129.6
SMBJ85A	NV	Uni-Dir	85.0	1	94.4	104.00	1	4.38	137.0
SMBJ85CA	DV	Bi-Dir	85.0	1	94.4	104.00	1	4.38	137.0
SMBJ90A	NX	Uni-Dir	90.0	1	100.0	111.00	1	4.11	146.0
SMBJ90CA	DX	Bi-Dir	90.0	1	100.0	111.00	1	4.11	146.0
SMBJ100A	NZ	Uni-Dir	100.0	1	111.0	123.00	1	3.70	162.0
SMBJ100CA	DZ	Bi-Dir	100.0	1	111.0	123.00	1	3.70	162.0
SMBJ110A	PE	Uni-Dir	110.0	1	122.0	135.00	1	3.39	177.0
SMBJ110CA	FE	Bi-Dir	110.0	1	122.0	135.00	1	3.39	177.0
SMBJ120A	PG	Uni-Dir	120.0	1	133.0	147.00	1	3.11	193.0
SMBJ120CA	FG	Bi-Dir	120.0	1	133.0	147.00	1	3.11	193.0
SMBJ130A	PK	Uni-Dir	130.0	1	144.0	159.00	1	2.87	209.0
SMBJ130CA	FK	Bi-Dir	130.0	1	144.0	159.00	1	2.87	209.0
SMBJ140A	PL	Uni-Dir	140.0	1	155.0	171.00	1	2.65	226.8
SMBJ140CA	FL	Bi-Dir	140.0	1	155.0	171.00	1	2.65	226.8
SMBJ150A	PM	Uni-Dir	150.0	1	167.0	185.00	1	2.47	243.0
SMBJ150CA	FM	Bi-Dir	150.0	1	167.0	185.00	1	2.47	243.0
SMBJ160A	PP	Uni-Dir	160.0	1	178.0	197.00	1	2.32	259.0
SMBJ160CA	FP	Bi-Dir	160.0	1	178.0	197.00	1	2.32	259.0
SMBJ170A	PR	Uni-Dir	170.0	1	189.0	209.00	1	2.18	275.0
SMBJ170CA	FR	Bi-Dir	170.0	1	189.0	209.00	1	2.18	275.0
SMBJ180A	PT	Uni-Dir	180.0	1	200.0	220.00	1	2.06	291.6
SMBJ180CA	FT	Bi-Dir	180.0	1	200.0	220.00	1	2.06	291.6
SMBJ190A	PU	Uni-Dir	190.0	1	211.0	232.00	1	1.95	307.8
SMBJ190CA	FU	Bi-Dir	190.0	1	211.0	232.00	1	1.95	307.8
SMBJ200A	PV	Uni-Dir	200.0	1	224.0	247.00	1	1.85	324.0
SMBJ200CA	FV	Bi-Dir	200.0	1	224.0	247.00	1	1.85	324.0
SMBJ220A	PX	Uni-Dir	220.0	1	246.0	272.00	1	1.69	356.0
SMBJ220CA	FX	Bi-Dir	220.0	1	246.0	272.00	1	1.69	356.0
SMBJ250A	PZ	Uni-Dir	250.0	1	279.0	309.00	1	1.48	405.0
SMBJ250CA	FZ	Bi-Dir	250.0	1	279.0	309.00	1	1.48	405.0
SMBJ300A	QE	Uni-Dir	300.0	1	335.0	371.00	1	1.23	486.0
SMBJ300CA	GE	Bi-Dir	300.0	1	335.0	371.00	1	1.23	486.0
SMBJ350A	QG	Uni-Dir	350.0	1	391.0	432.00	1	1.06	567.0
SMBJ350CA	GG	Bi-Dir	350.0	1	391.0	432.00	1	1.06	567.0
SMBJ400A	QK	Uni-Dir	400.0	1	447.0	494.00	1	0.93	648.0
SMBJ400CA	GK	Bi-Dir	400.0	1	447.0	494.00	1	0.93	648.0
SMBJ440A	QM	Uni-Dir	440.0	1	492.0	543.00	1	0.84	713.0
SMBJ440CA	GM	Bi-Dir	440.0	1	492.0	543.00	1	0.84	713.0


Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

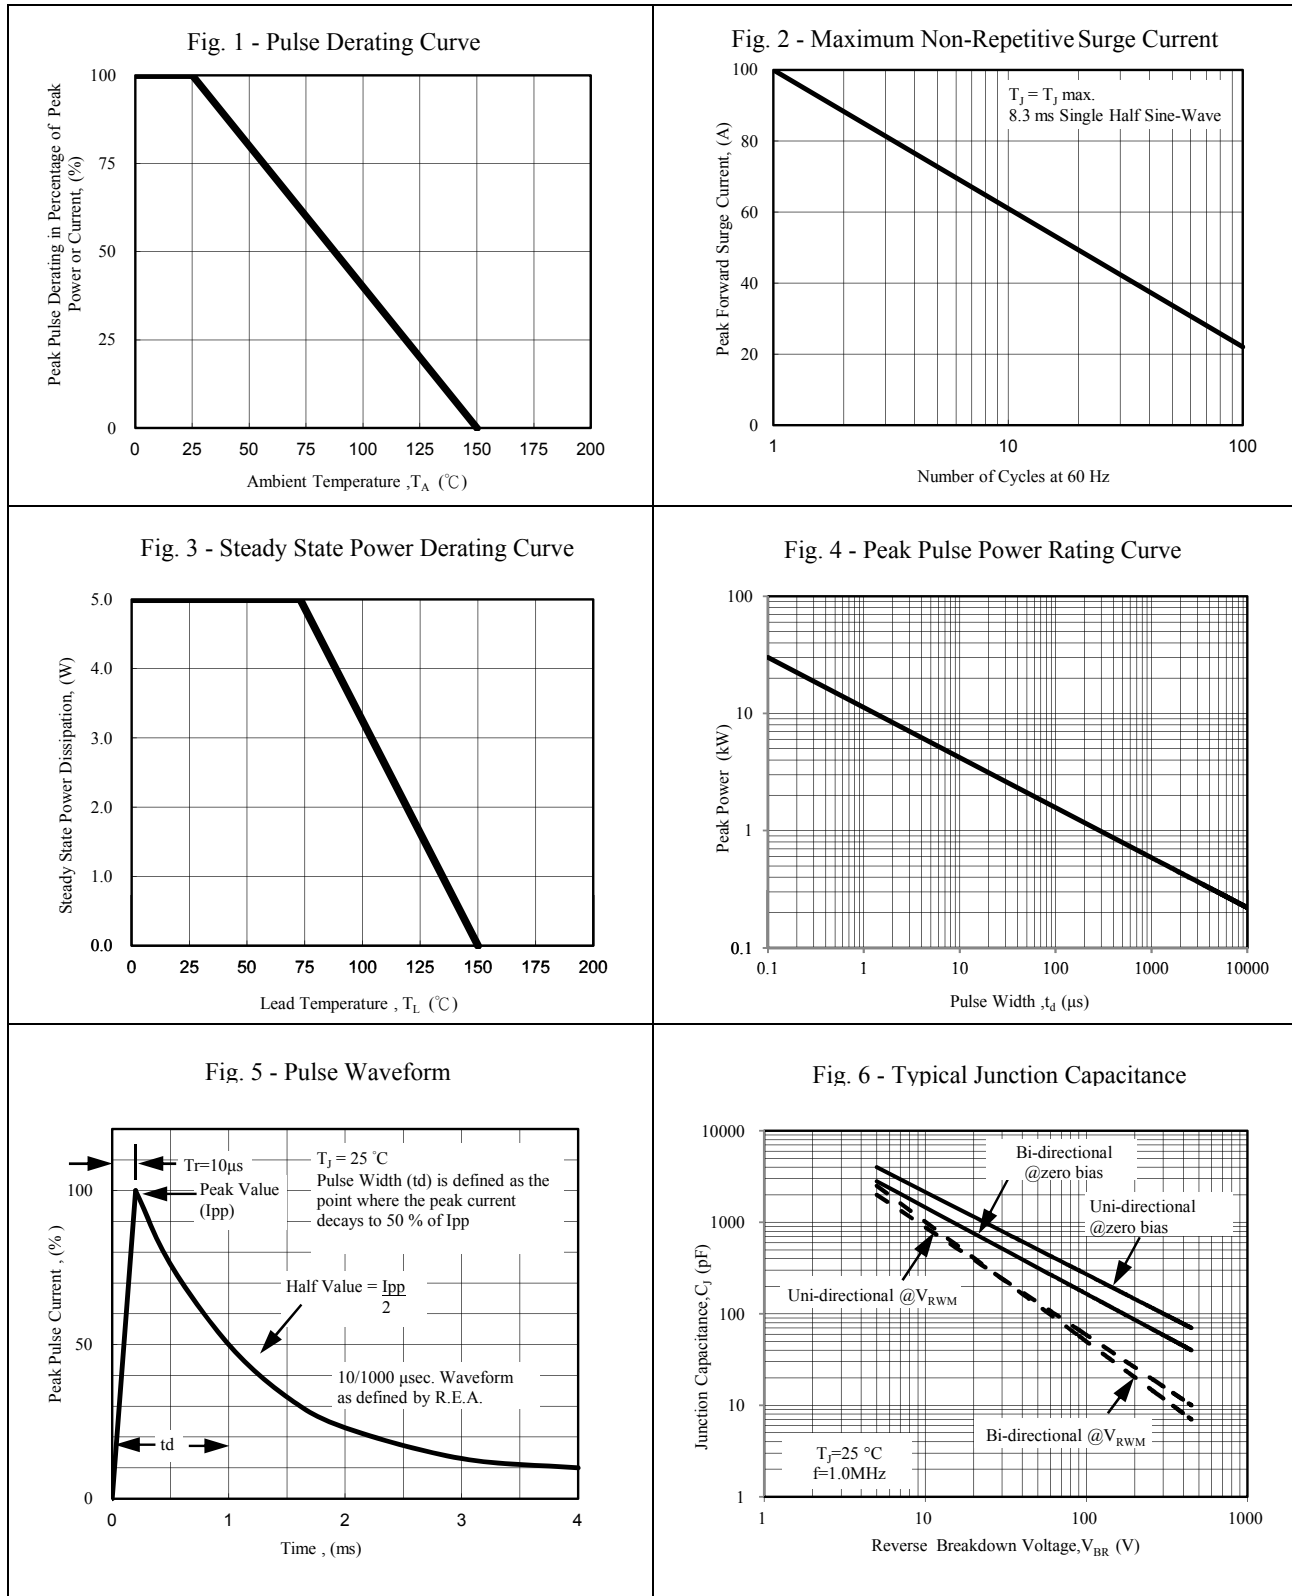


Package Dimensions

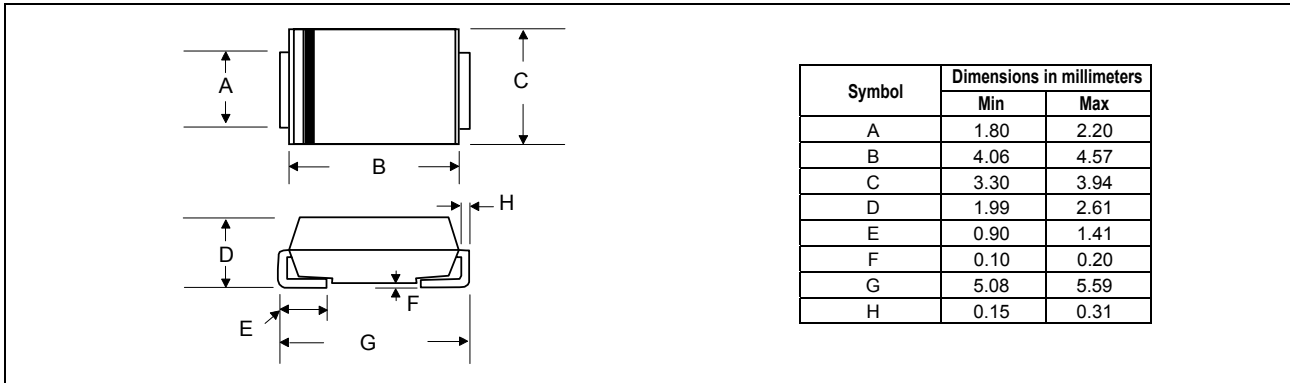


PAD Dimensions

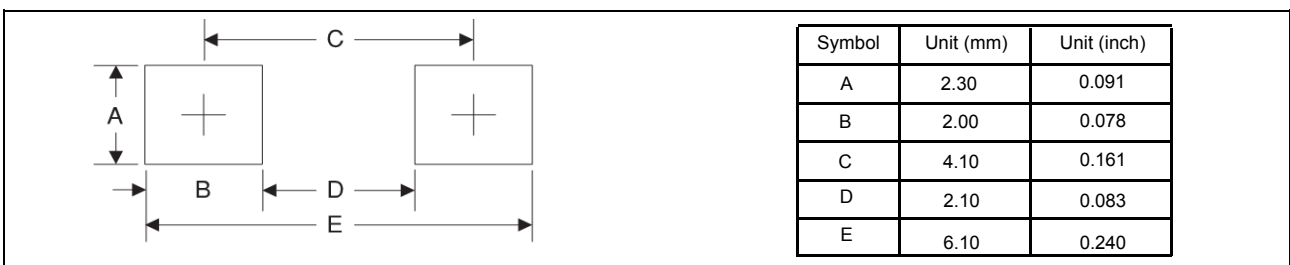

Packing Information

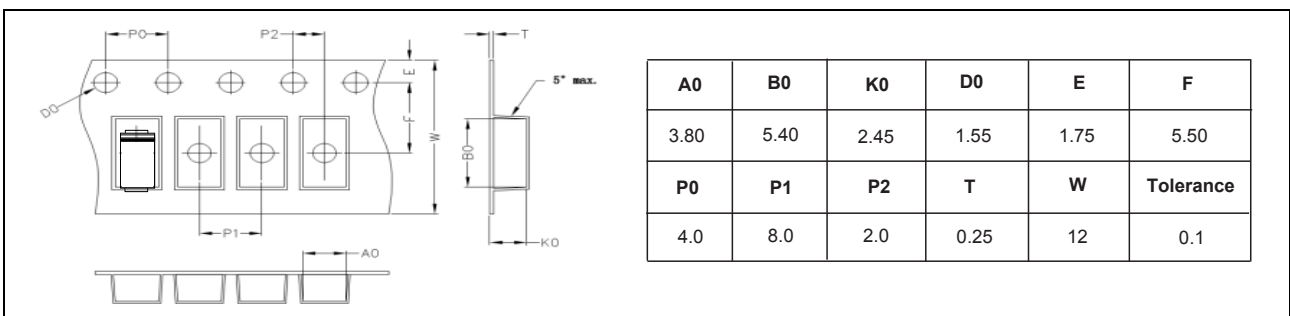

Marking

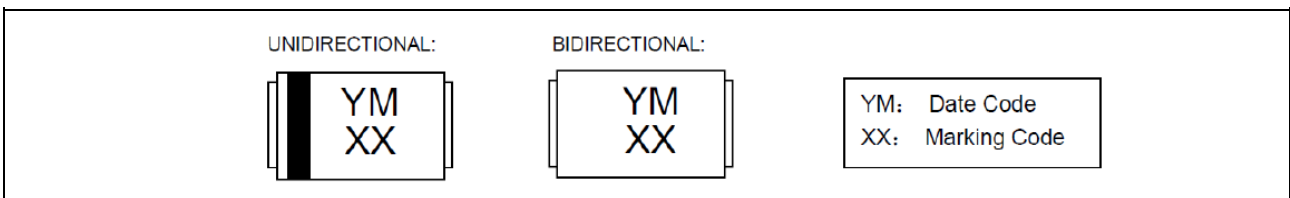

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
SMBJ Series	DO-214AA/SMB	Tape and reel	3000pcs / reel	EIA STD RS-481

Revision history

Date	Revision	Changes
23-May-2020	1.0	Initial release

CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, RDSEMI does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and RDSEMI assumes no liability what's ever relating to the choice, selection or use of the RDSEMI products and services described herein.

RDSEMI reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an RDSEMI product can reasonably be expected to result in personal injury, death or severe property or environmental damage. RDSEMI accepts no liability for inclusion and/or use of RDSEMI products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of RDSEMI products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by RDSEMI for the RDSEMI product or service described herein and shall not create or extend in any manner whatsoever, any liability of RDSEMI.

RDSEMI expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. RDSEMI only obligations are those in the RDSEMI Standard Terms and Conditions of Sale and in no case will RDSEMI be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice
© Copyright 2020, DaJing Semiconductor
All rights reserved